

microlab®


DVD AUDIO CABLE




SOUND CARD CABLE



(As diagram 2) Computer 5.1 channel sound card connection diagram 1



(As diagram 3) Computer 5.1 channel sound card connection diagram 2



microlab®

Usage:

1. Turn the BASS volume knob on the back of the woofer and the master VOLUME knob on the line control to minimum level, then turn on the switch.
2. Play a music program by adjusting the volume and bass control to your demanding level.

specification

*Amplifier specification:

Power Output	7Wx5+14W RMS
Frequency Response	35Hz-20KHz
Sensitivity	300mV
Harmonic Distortion	<0.3% 1W 1KHz
S/N	>70dB
Separation	>45dB

*Speaker unit:

Subwoofer 4"
Satellite 2.5"x5" magnetic shielded

* Signal Input:


RCAX6

* Signal Output :

RCAX5

Caution:

1. Do not exposed to dripping or splashing.
2. Do not placed any objects filled with water over the apparatus.
3. Do not block the ventilation holes.
4. For indoor use only.
5. When using high output signal, please don't turn the volume to maximum to avoid distortion or failure.
6. In case of long time not using, please plug off the power plug.

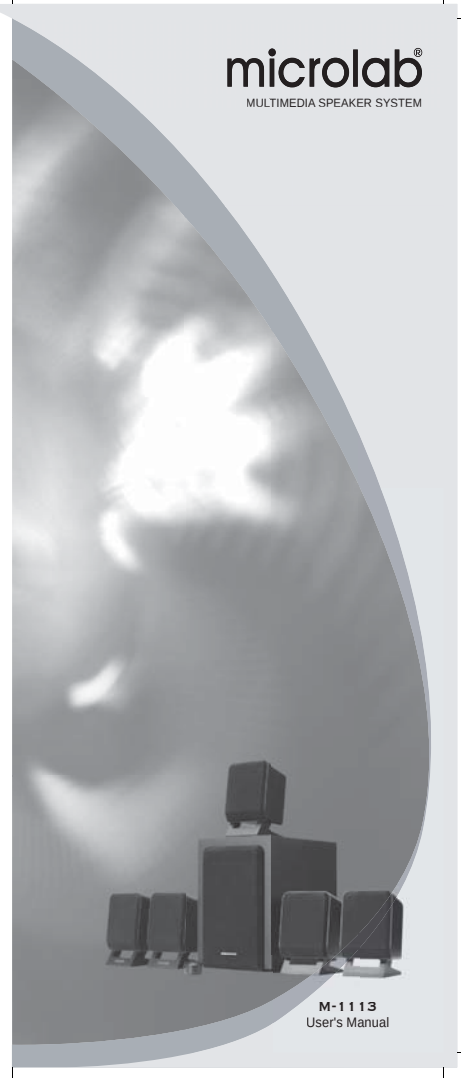microlab®
MULTIMEDIA SPEAKER SYSTEMM-1113
User's Manual

microlab®

Inside Package:

Subwoofer Speaker	1 pc
Satellite Speaker	5 pcs
Audio Cable	3 pcs
Line control	1 pc
User's Manual	1 pc

Features:

- * Real 5.1 channel support AC-3,DTS,THX.
- * 5.1 sound channel conversion design.
- * Professionally designed built-in amplifier ,subwoofer and satellite speaker designed.
- * 5" professionally enhanced subwoofer driver.
- * Outside heat sink designed.
- * Dynamic bass boost, low distortion.
- * The system can be connected to TV, VCD, DVD, CD and any other Audio output equipments.

Connection instruction:

1. (As diagram 1)
Connect satellite's cable to appropriate "Audio output" jacks on the woofer's rear panel.
2. Connect one end of the audio cable which have 6 quincunx plugs to appropriate audio output on DVD, the other end of the cable to appropriate "audio input" on the woofer's rear panel.
3. When connect to computer 5.1 channel sound card, Please refer to picture 2&3 to connect.
4. Make sure all connection are correct, then connect the power cord to AC outlet.

* Please refer to sound card instruction when connect 5.1 channel sound card.

microlab®

(As diagram 1) speaker connection diagram 1

